

# ClearView™

The visible choice for bathroom mirrors.



## Installation & Safety Instructions for Mirroworld ClearView™ System.

mirroworld



beyond reflection

www.mirrorworld.co.uk Tel: 0161 794 7100 email: sales@lecira.co.uk  
Unit 6 Swinton hall Rdd Ind Est Pendle Bury Road Swinton, Manchester. M27 4AJ

Congratulations for Purchasing Mirrorworld's ClearView™ mirror demisting system, Please read the following instructions carefully before installing your Clearview™ system.




## **Safety Information BEFORE commencing installation**

- Ensure all electrical circuits are isolated before attempting to connect your new Clearview system
- The Clearview System is NOT to be used in Sauna's, Steam rooms or Showers.
- Please check you Clearview system for any signs of damage before installations, Rips tears etc. as this may stop the device from working properly.
- When using multiple units together on one large mirror, these must NOT be overlapped but placed side by side allowing a clearance of at least 2 cm.
- Clearview Systems are a sealed unit and must NOT be cut, drilled or resized as this may sever the internal element. Many sizes and shapes are available to choose from.
- Caution should always be taken when installing electric equipment, if in doubt consult a qualified electrician.
- Clearview system must NOT be sited within 0.6m of any bath or shower basin.
- Unit fitted within 0.6m - 3m of bath or shower basin must be installed with RCD protection.

Preparation is the most important part of any project, read all the guides and have the correct tools to hand to complete the job.

Prepare and measure the most suitable location for you new mirror, remembering that not everybody in the household may be your height.

**Figure A** shows dimensions for fitting a typical ClearView™ mirror with Screws, above a sink. (these dimensions are for example only)

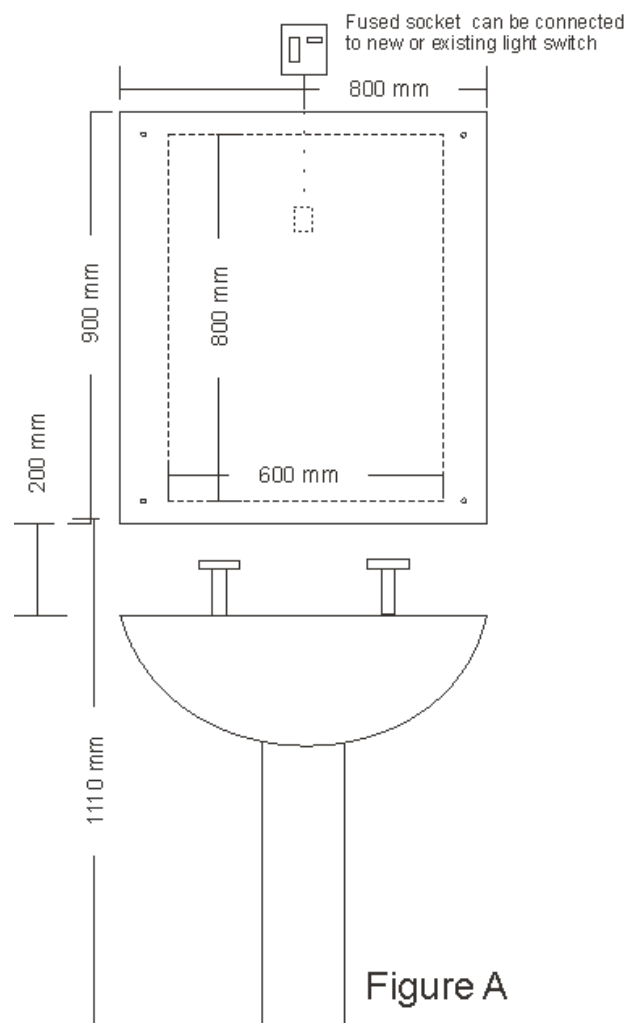


If you are installing a mirror without a frame special care should be taken to chase out a small area of the wall that will correspond with the wiring housing on the back of the Clearview pad.

Take care to establish the best way the wires will exit from the mirror, above centre, side etc.

## Attaching the ClearView™ pad to the mirror

Firstly draw with a FELT pen or very lightly with pencil as to not scratch the back of the mirror, where you will be placing the pad on the back of the mirror. Then starting from the upper edge peel 1-2cm of the plastic backing away from the pad and fold over, exposing one edge 1-2cm wide of sticky surface. Align this edge with the marks made on the back of the mirror, taking care that the edge is straight. See **Figure B**

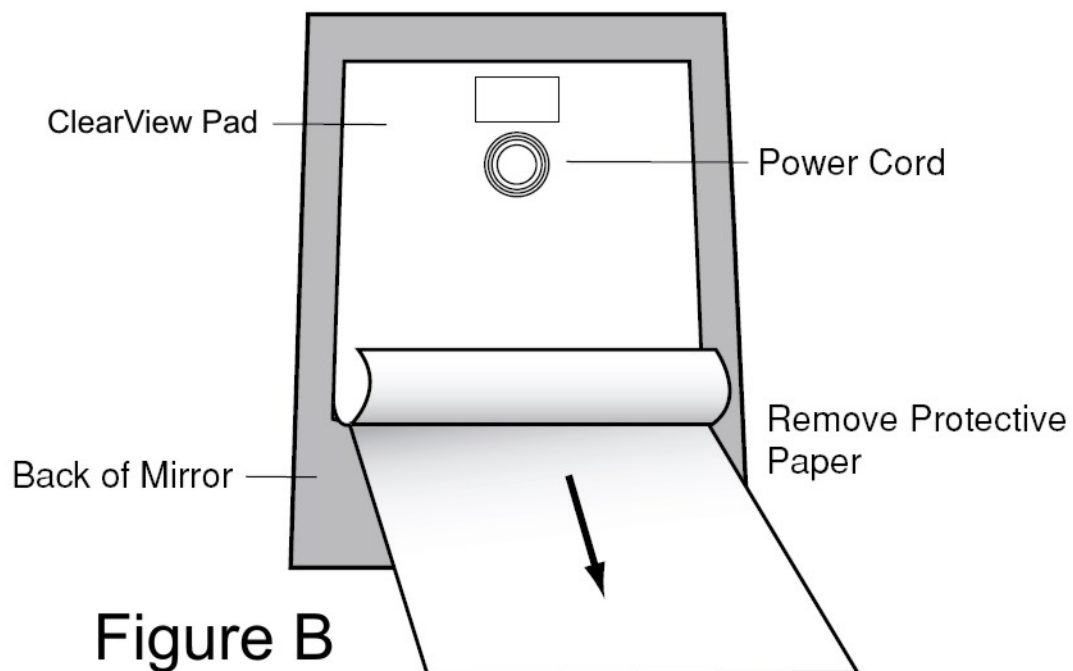

**Figure B**

Carefully peel away the remaining protective cover and gradually smooth down from the top edge, taking care to remove any air bubbles.

When fixing a mirror with adhesive only use adhesive on area of the mirror not covered by the Clearview pad.

Many options will be available to you for connecting to the power supply and switching on/off of the system.

If in any doubt about regulations or connections please consult a qualified electrician.

Mirrorworld are NOT responsible for fitting your ClearView™ system and the above notes are for the purposes of guidance only.

## Cleaning the Mirror

Once the mirror has been installed it may be cleaned in the way any normal mirror may be cleaned using window / glass cleaner and a soft dry lint free cloth.